



J. LANFRANCO

LOCKNUTS FOR CRITICAL BOLTED JOINTS

MODULAR FIXTURES (STAINLESS STEEL CHANNEL)

Threading: Standard to ISO 262 / ISO 965-2


Characteristic and performance tests: ISO 2320 / ISO 3506-2

Material: Stainless Steel A2-70

Surface treatment: (Standard to ROHS requirements)

Stainless Steel- Antigalling - Stanal ® 400 - Sherardisation - Passivation

Field of application: Contact Us

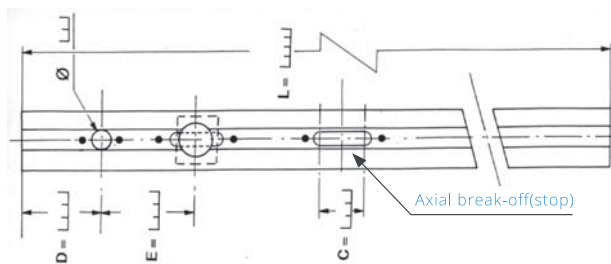

<p>Ref. 201144</p> <p>Material: AISI 304 Z6 CN 1809</p>	M3 to M5	M3 to M5 Deflections	M3 to M5	M3 to M6
<p>Ref. 203010</p> <p>Material: AISI 304L Z2 CN 1810</p>	M3 to M8	M3 to M8 Deflections	M3 to M8	M3 to M8
<p>Ref. 203326</p> <p>Material: AISI 304L Z2 CN 1810</p>	M6 to M12	M6 to M12 Deflections	M6 to M10	M8 to M12
<p>Ref. 203048</p> <p>Material: AISI 304L Z2 CN 1810</p>	M6 to M10	M6 to M10 Deflections	M6 to M8	M6 to M12



EASE OF USE:

- From 25 mm to 6 meters long
- Unlimited quantity of nuts and / or screws can be positioned within the channel
- Range of diameter for nuts and / or screws
- Range of type of nuts and/ or screws (possible combination)
- Equidistance between products
- Internal technical setup (oval holes, lights, spring mounts, prepunched rivet holes)
- Channels may be manufactured straight, bent and / or curved.

For special applications and inserts, please do not hesitate to contact us





J. LANFRANCO

LOCKNUTS FOR CRITICAL BOLTED JOINTS

MODULAR FIXTURES (LIGHT ALLOY CHANNEL)

Threading: Standard to ISO 262 / ISO 965-2


Characteristic and performance tests: ISO 2320

Material: Light alloy

Surface treatment: (Standard to ROHS requirements)

All Treatments

Field of application: Contact Us

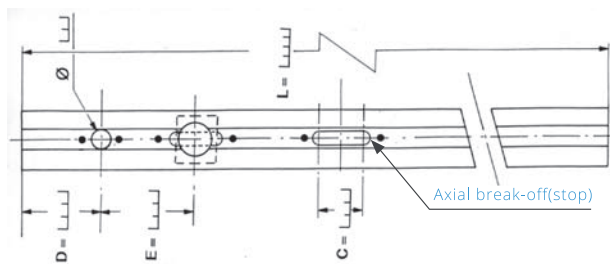

<p>Ref. 101000</p> <p>Material: AISI 6060 A GS T5</p>	M3 to M5	M3 to M5	M3 to M5	M3 to M6
<p>Ref. 403010</p> <p>Material: AISI 1050 A A5</p>	M3 to M8	M3 to M8	M3 to M8	M3 to M8
<p>Ref. 403048</p> <p>Material: AISI 1050 A A5</p>	M6 to M10	M6 to M10	M6 to M10	M6 to M12
<p>Ref. 501000</p> <p>Material: AISI 6060 A GS T5</p>	M6 to M10	M6 to M10	M6 to M10	M6 to M12

EASE OF USE:

- From 25 mm to 6 meters long
- Unlimited quantity of nuts and / or screws can be positioned within the channel
- Range of diameter for nuts and / or screws
- Range of type of nuts and/ or screws (possible combination)
- Equidistance between products
- Internal technical setup (oval holes, lights, spring mounts, prepunched rivet holes)
- Channels may be manufactured straight, bent and / or curved.

For special applications and inserts, please do not hesitate to contact us

